ARCHELON™

KEEP YOUR TABLETS SAFE

Assembly Instructions

for Archelon v1.2

Additional items you may need to assemble your Archelon (not provided):

a) Tape – Scotch or Other optional for use with a charging cable
b) Drill
c) ¾” drill bit
d) ¼” drill bit

1) Open enclosure parts and tool assembly package. The package will include…

2) Lay the faceplate on a smooth, no-slip surface ensuring the home button opening is at the bottom.

3) If you are covering the home button, make sure the home button cover (F) is in the home button opening on the front of the Archelon.

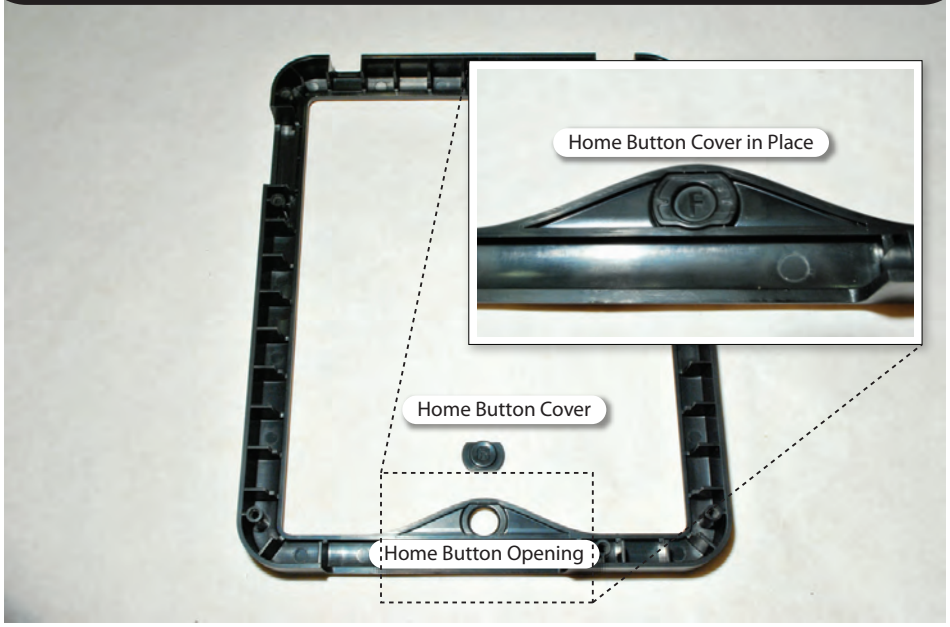

Instructions for Optional Archelon 1.2 Swipe P.O.S. 30-Pin kit for MAGTEK® iDynamo

Magtek iDynamo Adapter Kit includes…

4) Carefully place the iPad®, face down, onto the faceplate making sure the Apple logo is as shown, continue onto step 5 if not using the MAGTEK® iDynamo Adapter Kit (optional).

2) Carefully place the iPad®, face down, onto the faceplate making sure the Apple logo is as shown and insert MAGTEK® iDynamo Card Reader as shown.

3) Place Magtek iDynamo Adapter over Card Reader

4) Adapter Installed over Card Reader. Continue to Step 8 to complete installation

5) Decide if you would like to be able to remove out the charging cord while the iPad® is in your Archelon. If you would like access to pull out the cord, use adapter "D". If you would like the cord to be secure and unable to pull out while the iPad® is in your Archelon, use adapter "E".

6) OPTIONAL ADAPTER "D" ONLY: Insert adapter making sure the square key is facing up. Route power cable through the Archelon as shown.

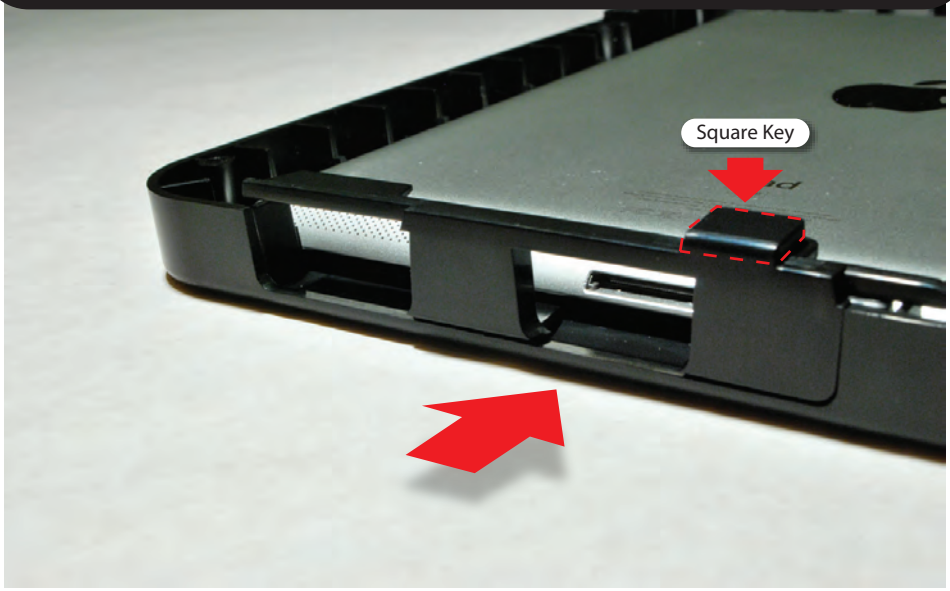

7) OPTIONAL ADAPTER "E" ONLY: Pull power cord through the opening in Adapter "E" and plug power cord into the iPad®. Place Adapter "E" into its spot on the Archelon making sure the square key is facing up. *Note: You may need to slightly lift the iPad® to fit the adapter securely.*

8) OPTIONAL PORT PLUGS (A, B & C) Decide what ports you would like to keep open and what ports you would like to close. If you want access to all ports, put aside pieces A, B & C).

9) If you are using the port plugs, insert plugs into their intended holes as shown. If you are using plug A, make sure to change the setting on your iPad® to continuously be on. Once install is complete, you will not be able to access the power button to turn the iPad® on or off without having to disassemble the frame.

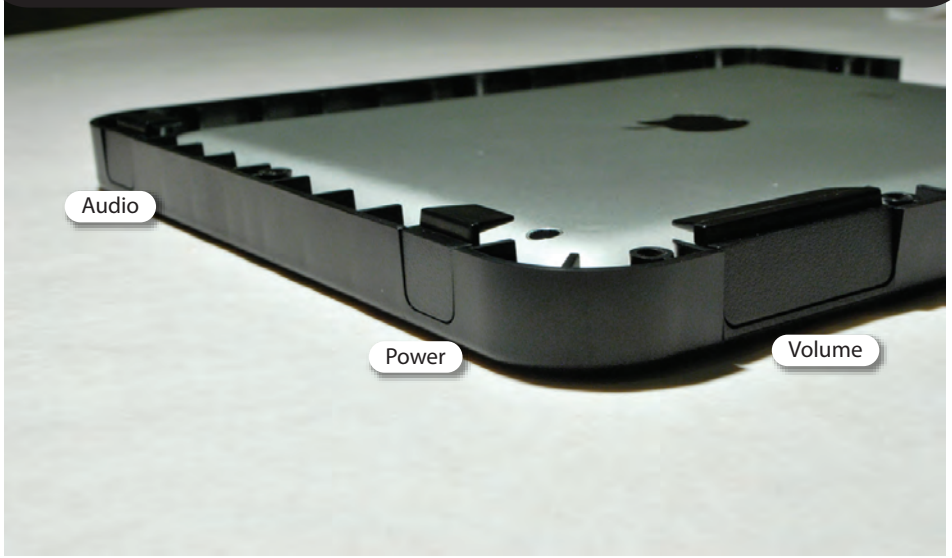

10) Cable Routing : Route power cable through the back plate as shown in RED. Carefully place backplate with power cord* onto faceplate as shown in step 11.

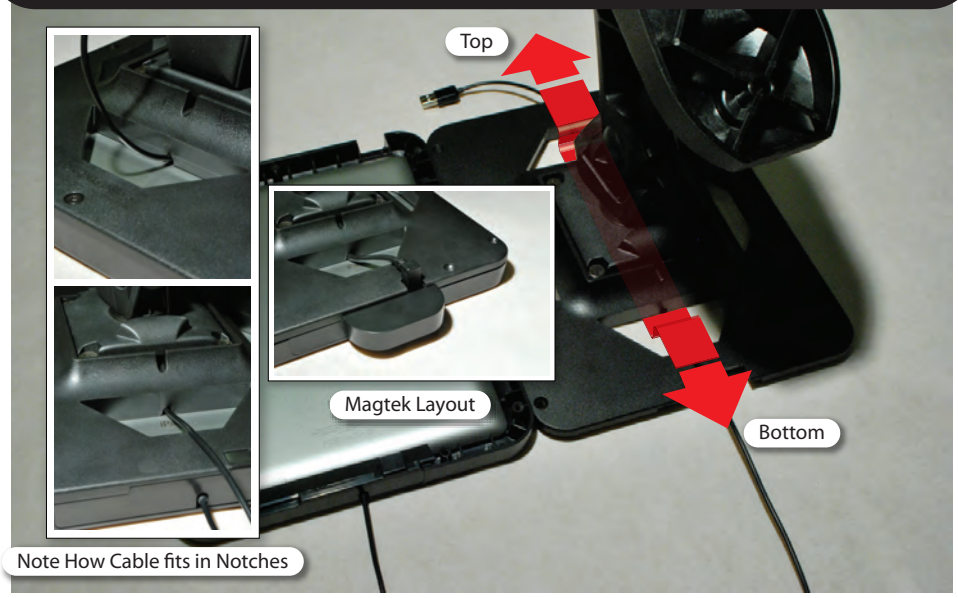

11) Carefully fasten the Archelon backplate to the faceplate using the supplied security screws. Note: Hand tighten in the order shown in the inset photo.

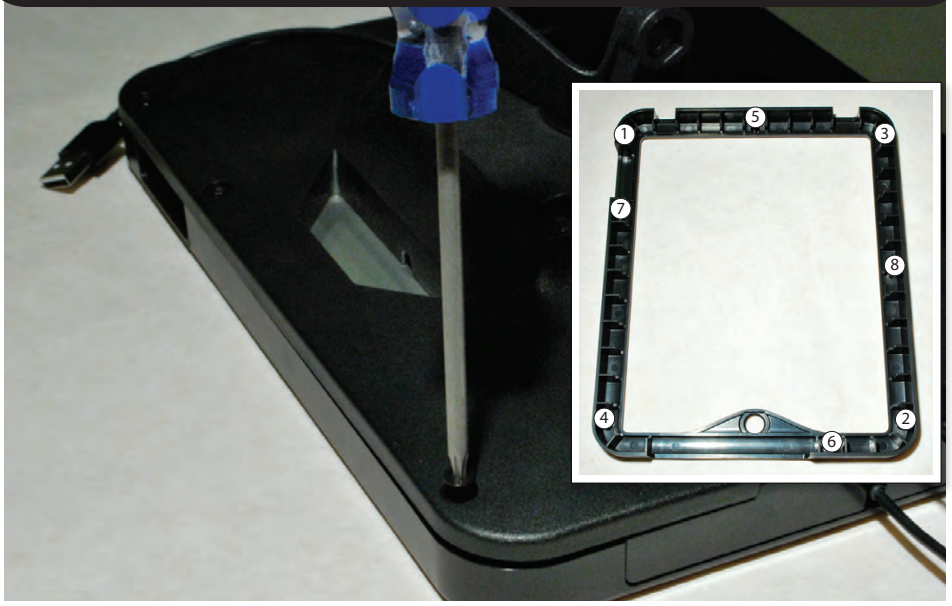

12) Weave power cord through cord management system on the back of the Archelon. *Note: If using the optional mounting base please continue to the supplemental section in green*

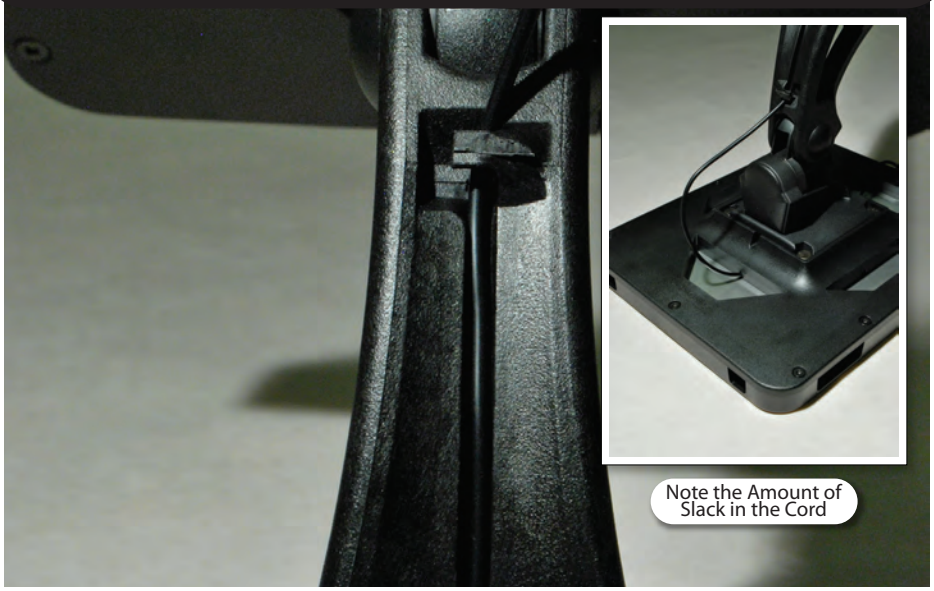

13) Using the supplied mounting template, tape into place where you would like to mount your Archelon. Make sure there is a 110v power source if you want to keep your iPad® charged. Keep a minimum of 4″ clear space (away from walls or other obstructions) to allow the Archelon to operate in its' full range of motion.

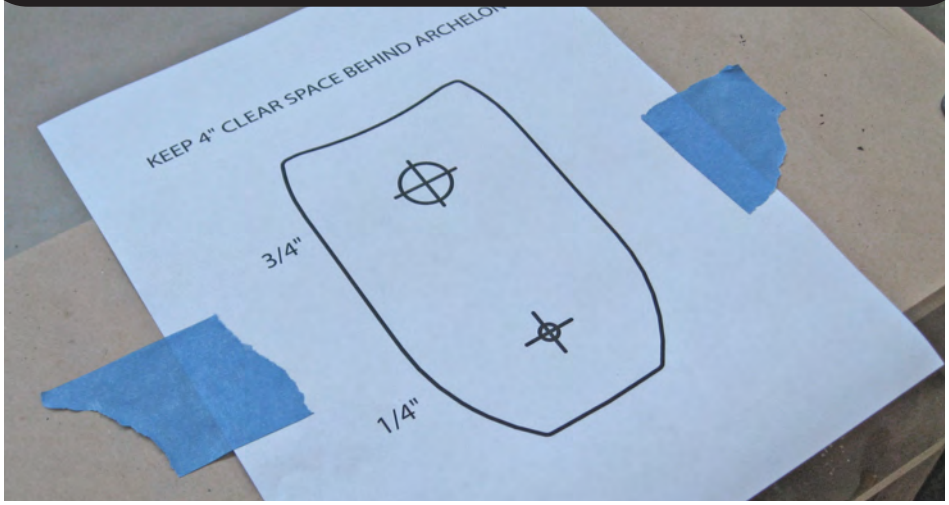

14) Using a ¾″ drill bit (for thimble hole only!), drill through the surface. Using a ¼″ drill bit, drill bolt hole. Note: make sure correct drill bit is used for your specific surface.

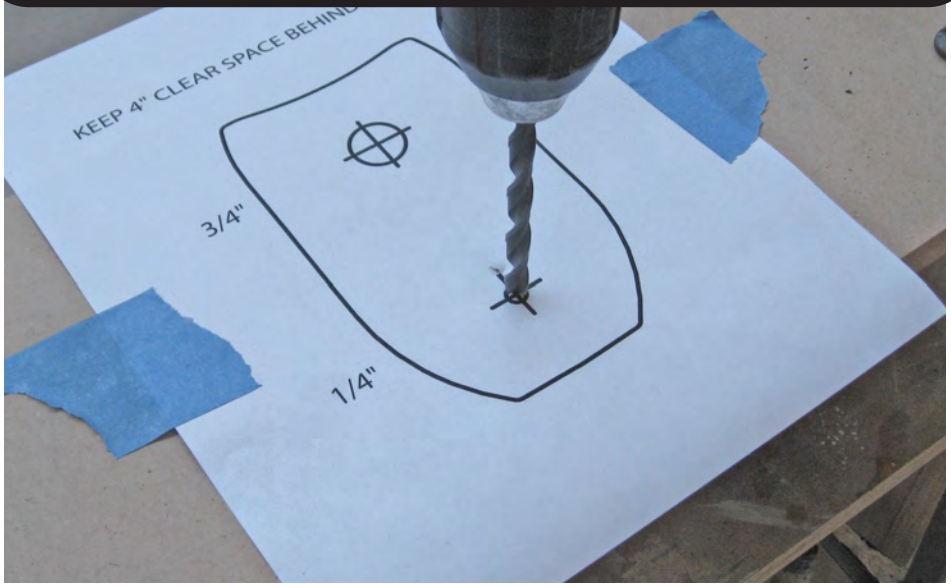

15) Insert power cord (USB connector first) into thimble hole.

16) Firmly press the mounting thimble into the base making sure the slot aligns with the notches as shown. Route power cord as shown and install into the thimble hole.

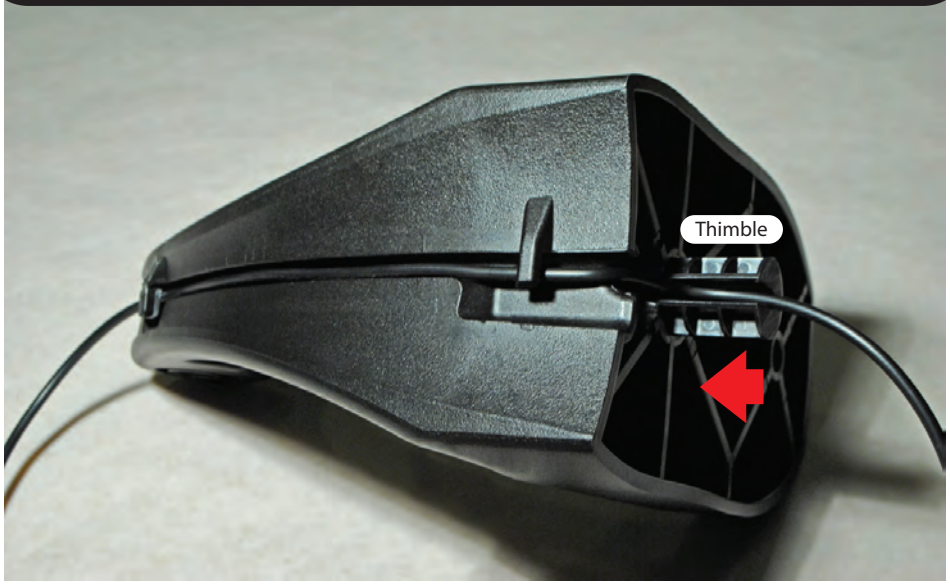

17) Install lag bolt (or machined bolt with supplied pan washer, lock washer and nut) as shown.

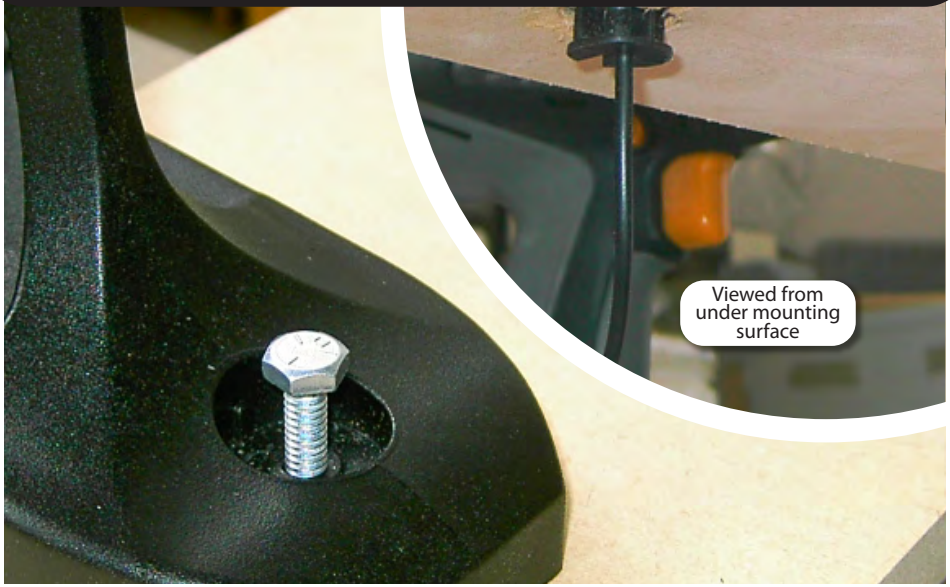

18) Press the bolt cap into place and you're done!

Instructions for Optional Archelon 1.2 Optional Mount Kit

Mounting base kit includes…

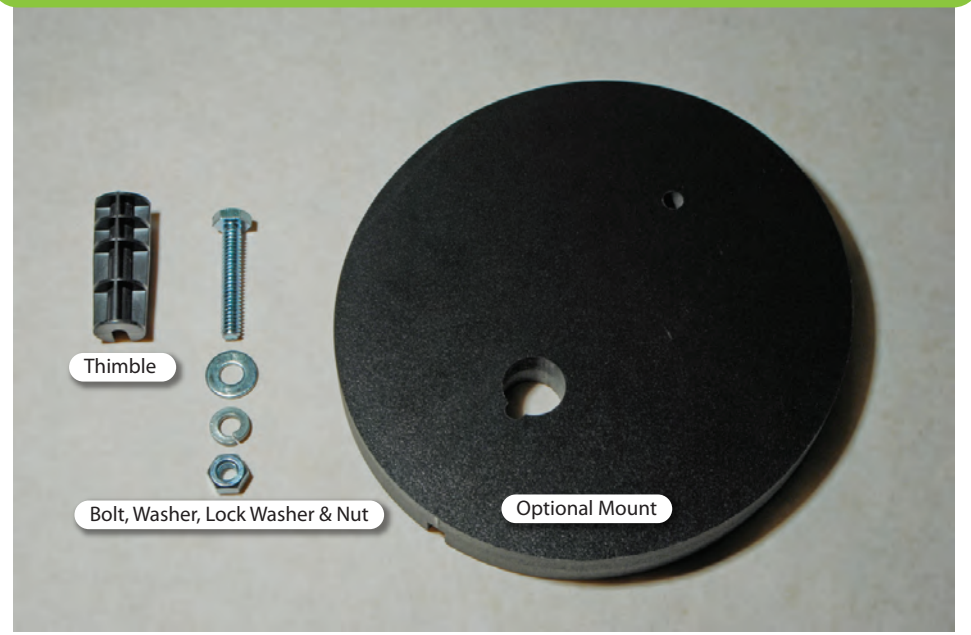

1) Optional mounting base comes w/pre installed VHB double sided tape. ***CAUTION! VHB Tape (SHOWN IN RED) will form a permanent bond with it's mating surface. Removal may result in damage to surface!***

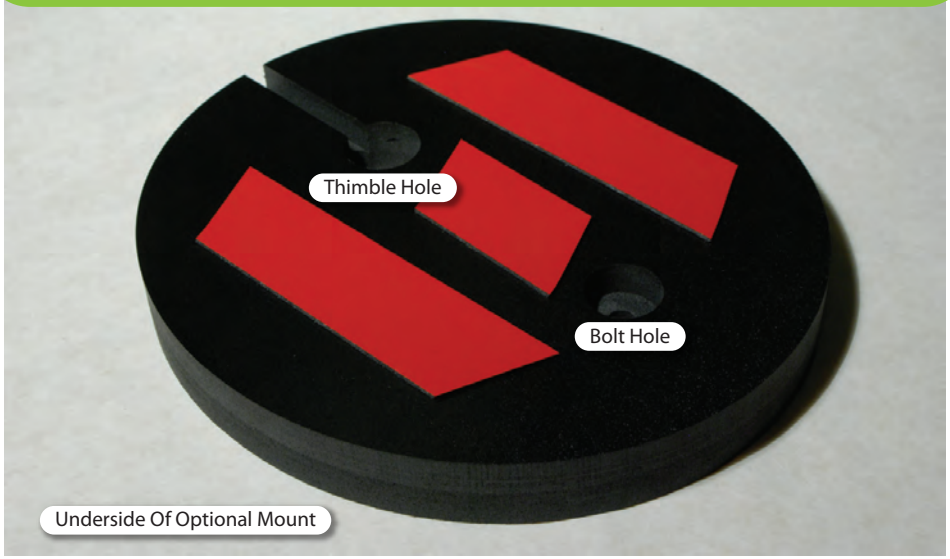

2) Firmly press the thimble into base making sure the slot aligns with the notches as shown. Route power cord as shown and install into the thimble hole.

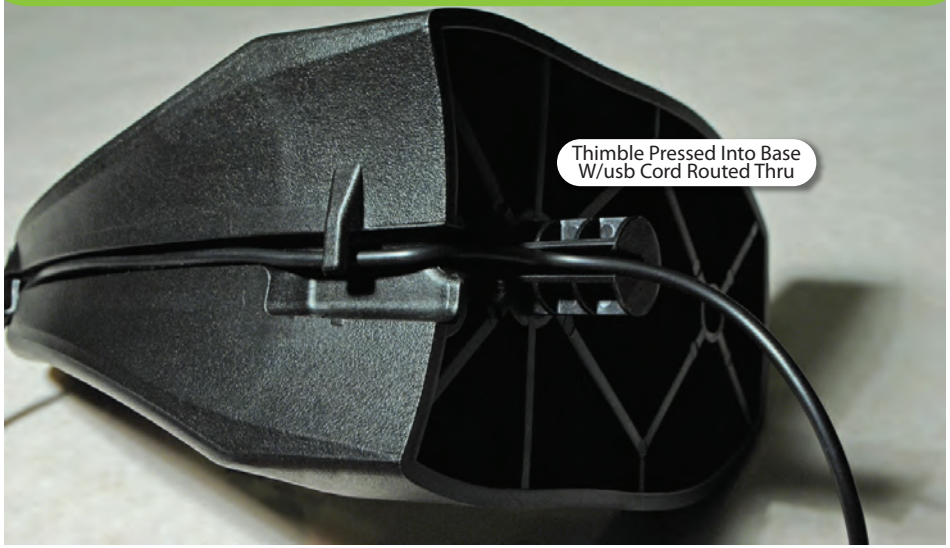

3) Insert USB Cable into Thimble Hole

4) Align Archelon onto Optional base thru the correct holes. Route cable as shown thru the slot.

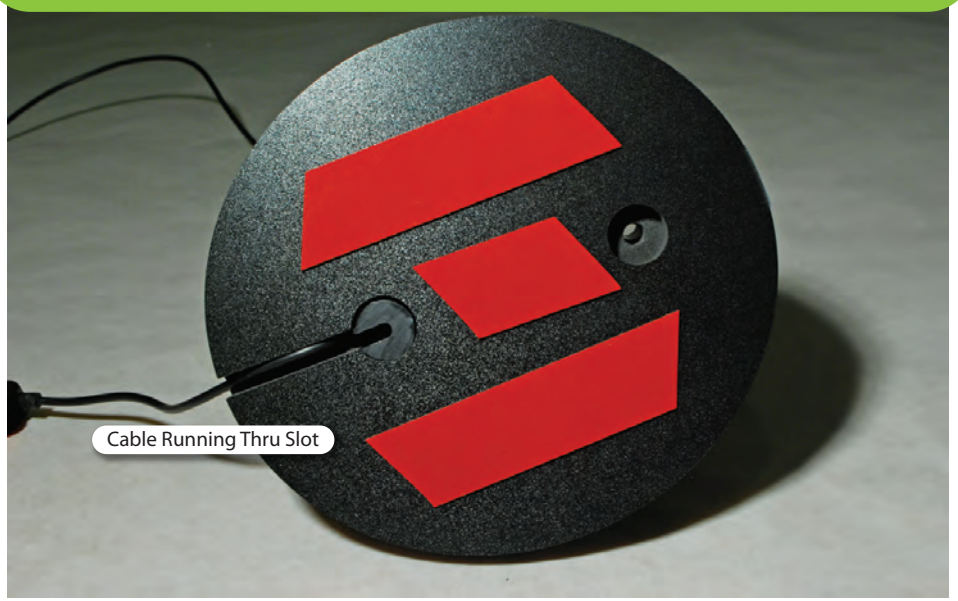

5) Install machined bolt w/supplied washer, lock washer & nut as shown.

6) With the machined bolt tightened remove the red VHB backing tape exposing the adhesive.

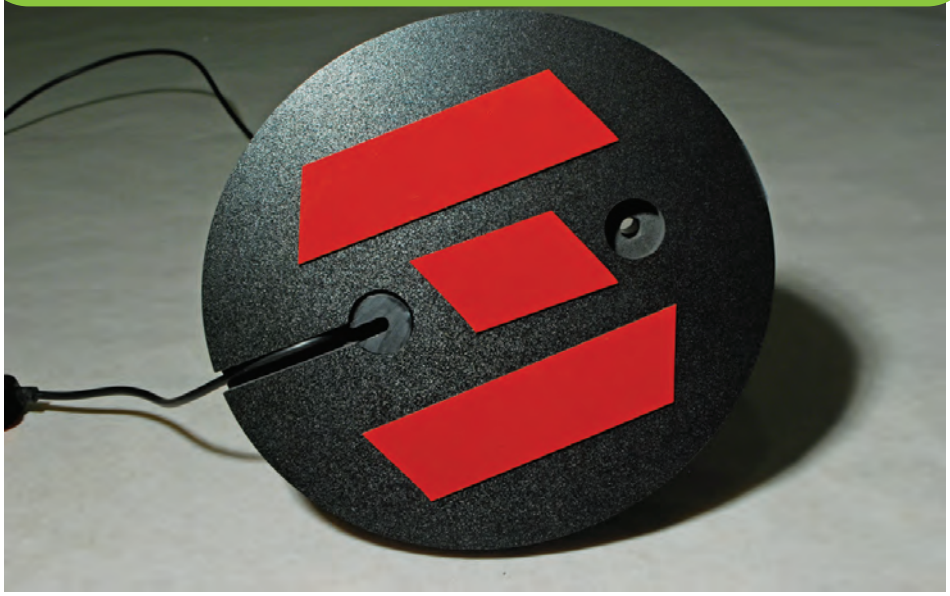

7) You are now ready to place the assembled Archelon onto your smooth & clean surface! Press the bolt cap into place and you're done!

The power cord is required to operate the iPad® continuously. Not using the power cord will required the iPad® to be recharged as battery life declines.

ARCHELON™

KEEP YOUR TABLETS SAFE